

Reisopack®


Strapping technologies

High Speed Strapping

Machine with

Automatic Corner Placer

70
PALLETS
/HOUR

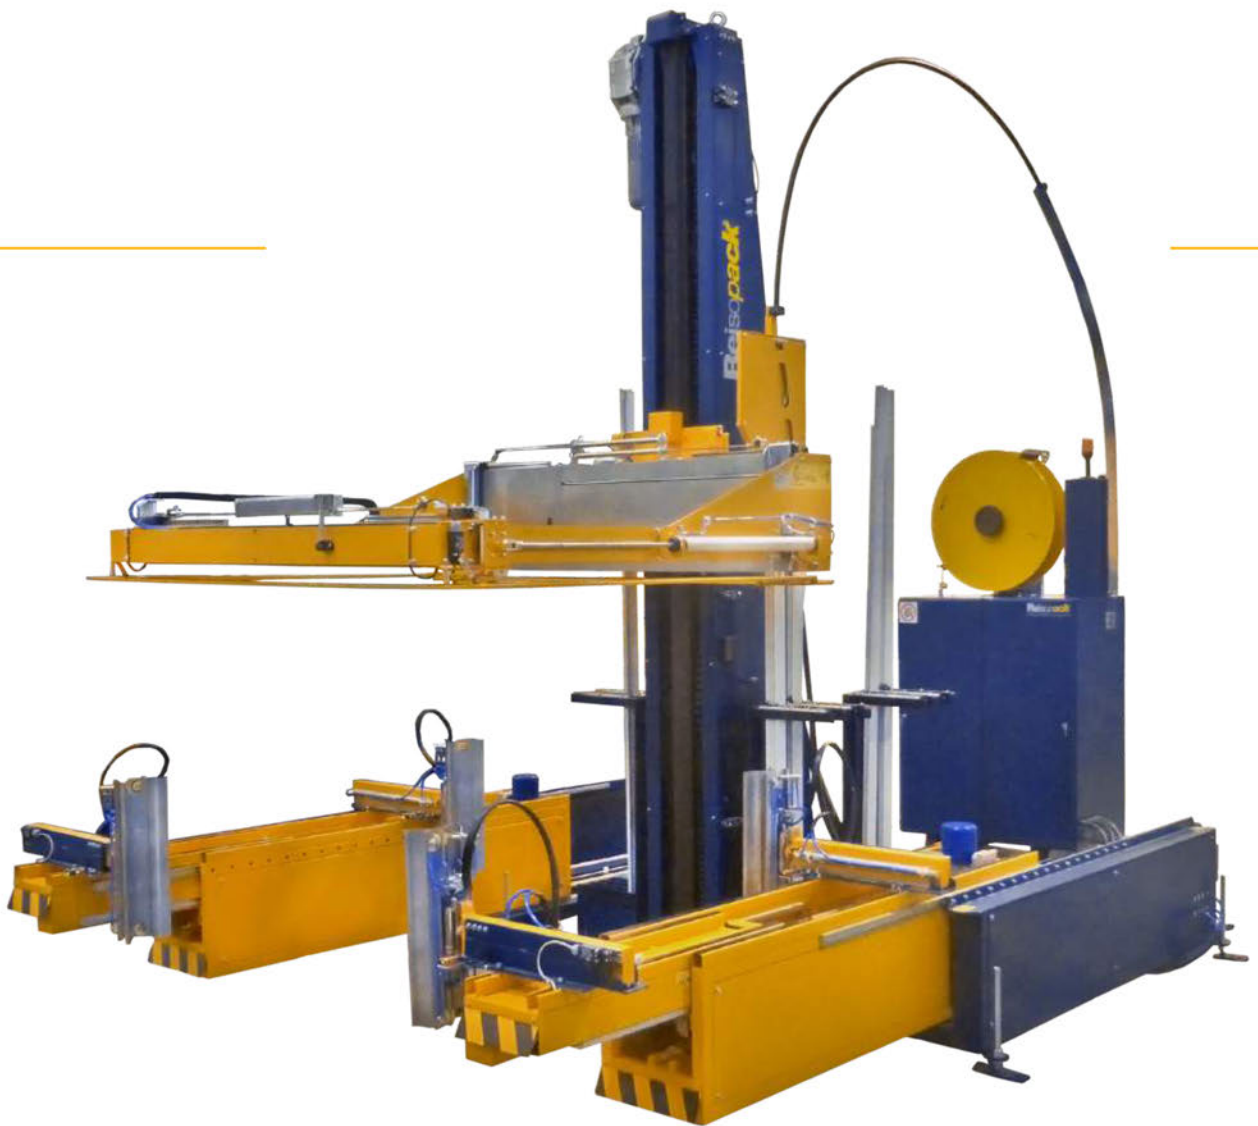

Strapping Machine
High Speed Automatic Corner Placer

2905



877-235- 5993



www.legacypkg.com



support@legacypkg.com

2905HS

Strapping Machine High Speed Automatic Corner Placer

High Speed Horizontal Automatic Strapping Machine with Automatic Corner Placer System.

- Own technology and manufacturing. Only 1st quality european components.
- Touch screen control panel LCD TFT of 5'6 inches.
- Able to store up to 10 different strapping programs for different products.
- Automatic corner placer system.
- CRC Technology for a perfect placement of corners.
- Strap empty alarm.
- High speed strapping machine for big productions.
- Double corners deposit..
- Arch pressers for load compacting.
- Electronic tension adjustable from the control panel.
- Long life aluminium strapping head Reisopack1900.
- Production up to 70 pallets / hour.
- Security system with engine direction reversal.
- Visual signaling of errors.
- Integrable in fully automated lines.




All settings available on touch screen control panel

Strapping Machine High Speed Automatic Corner Placer



CRC Technology for a perfect placement of corners

Automatic corner placer with pallet size detection

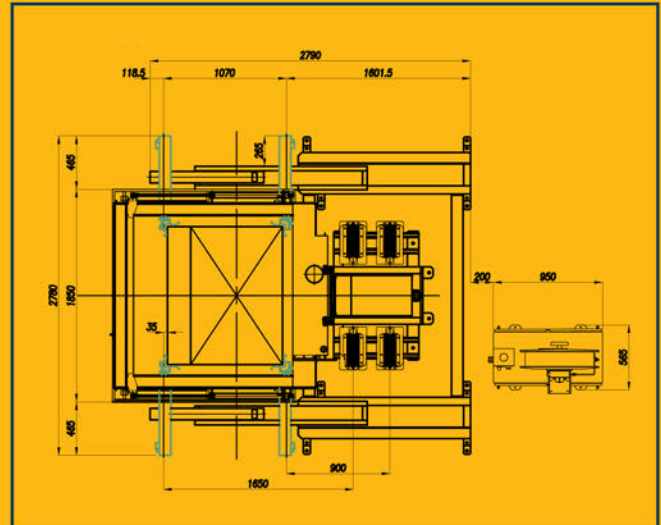

CHARACTERISTICS

VOLTAGE: 220 V / 380 V - 50/60 Hz. 3 Phase.

POWER: 2Kw. APPROX. PRODUCTION: 70 Pallets / hour.

AIR PRESSURE: 6 atm.

MACHINE DIMENSIONS: 2780 X 3240 X 4200 mm.

STRAPPING RANGE: From 130 mm to 2650 mm (5'12 - 104'33 inches)

TECHNICAL SPECIFICATIONS

STRAP WIDTH: 8-12-15'5 mm. (Factory set).

STRAP THICKNESS: 0,63-0,85 mm.

HEATING SYSTEM: Electrical heating. Adjustable welding temperature and cooling time.

TENSION RANGE: From 1 Kg to 150 Kg.

Edition 01/17 - The manufacturer reserves the right to make changes without prior notice

