


Reisopack[®]

Strapping technologies

**Maximum performance
in pallet strapping**

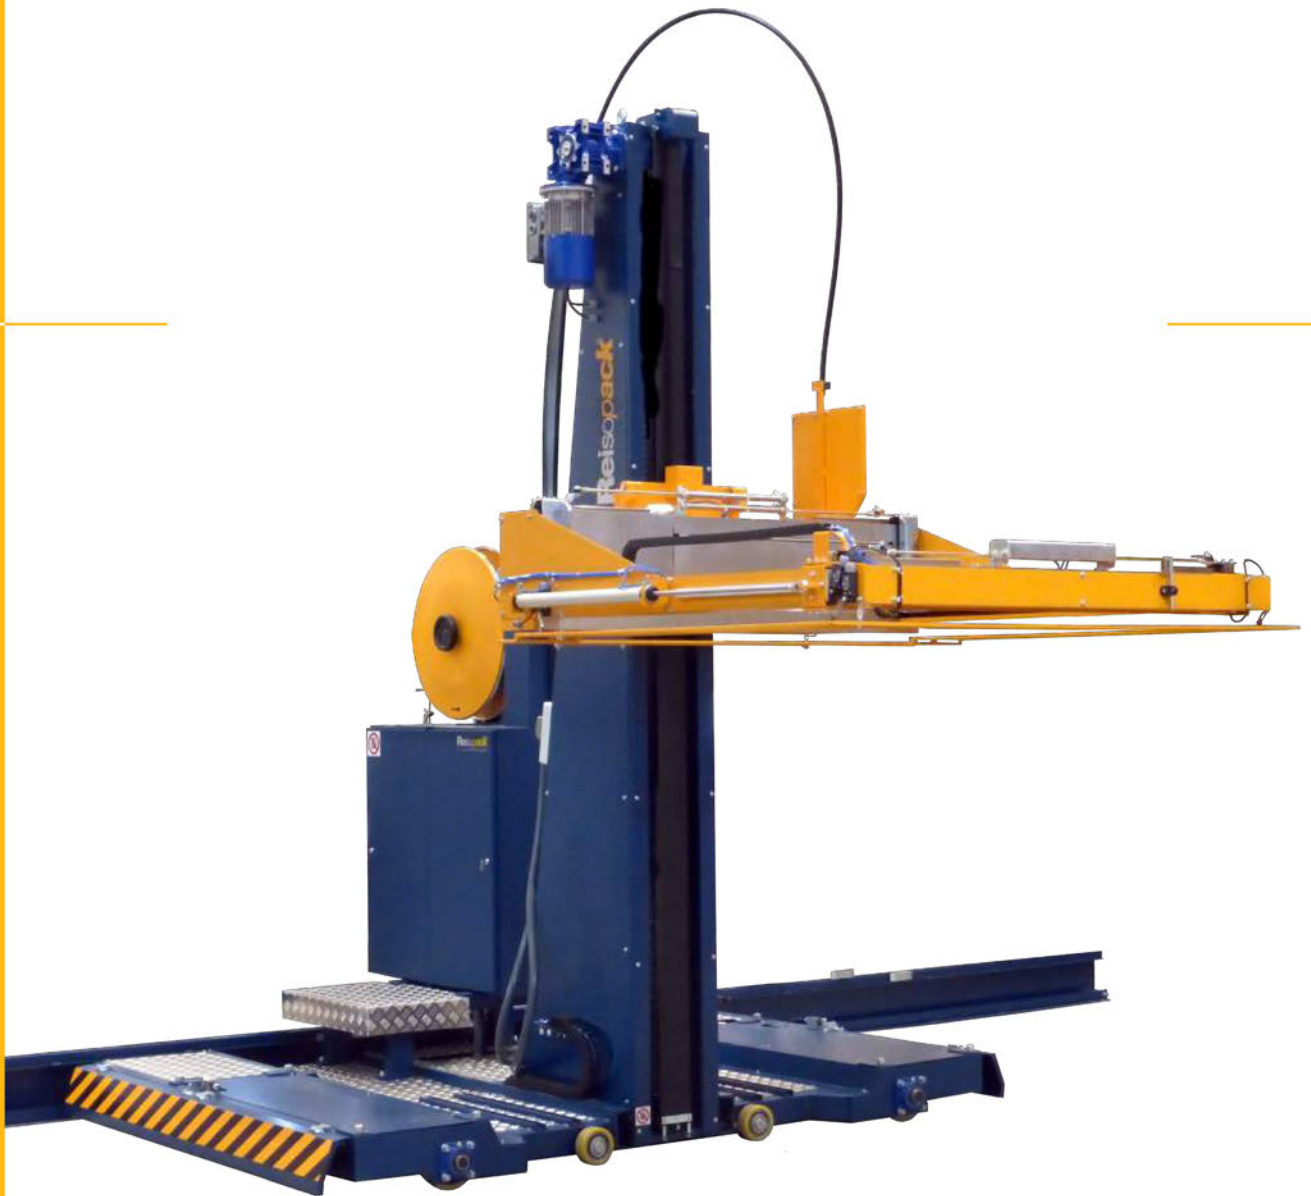

**Strapping Machine
Horizontal Automatic Mobile Base**

2913



877-235- 5993



www.legacypkg.com



support@legacypkg.com

2913


Strapping Machine Horizontal Automatic Mobile Base

Automatic horizontal strapping machine with lateral displacement. Ideal option to take a leap in productivity.

- Own manufacturing and technology using highest quality components.
- Touchscreen control 5'6 inch TFT LCD.
- Able to store up to 10 different strapping programs.
- Compression system in the arch compacts load and guides the strap to the correct position.
- Mechanical tension adjustable through a holding strap system to get the highest tension.
- Aluminium head Reisopack 1900 long lasting.
- Approximate production higher than 50 pallet per hour.
- Security system under the arch with reverse engine.
- Visual signaling errors.

OPTIONS:

- Electronic tension.
- Strap empty alarm.
- CRC technology to perfectly reposition of the corners.
- High Speed version.
- Additional station.
- Tactile button post.

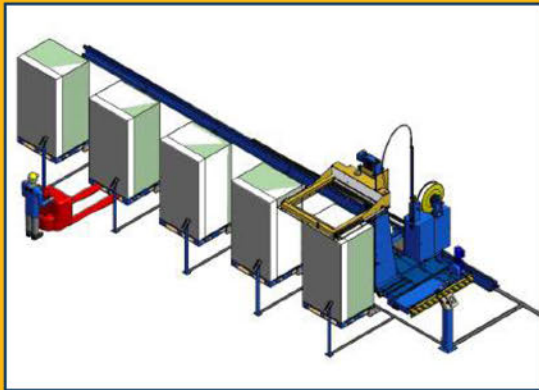

The machine moves laterally between the different stations.



Automatic strapping head REISO1900



The strapping machine 2913 is controlled by touch screen and is capable of memorizing 10 different programs with up to 10 different strapping heights each.

GENERAL CHARACTERISTICS

VOLTAGE REQUIRED: 220 V / 380 V - 50/60 Hz. 3 Phase + Neutral

POWER: 2 Kw. APROX. PRODUCTION: 50 pallets/hour

AIR PRESSURE: 6 atm.

MIN. STRAPPING HEIGHT: 140 mm

MAX. STRAPPING HEIGHT: 2650 mm

TECHNICAL SPECIFICATIONS

STRAP WIDTH: 8 - 12 - 15'5 mm (factory set)

STRAP THICKNESS: 0'63 - 0'85 mm

WELDING: Electrical heating.

Adjustable welding temperature and cooling time.

MACHINE DIMENSIONS: 2902 x 4180 x 4550 mm

Edition 06/17 - The manufacturer reserves the right to make changes without notice.



877-235- 5993



www.legacypkg.com



support@ legacypkg.com