

Reisopack®

Automatic strapping machine
Vertical strapping with top seal

2200

Strapping technologies

**The compatible solution
for vertical strapping**




2200

Automatic strapping machine Vertical strapping with top seal

Automatic machine for the vertical strapping of pallets irrespective of their size.

- Our own in-house manufacture and technology using top quality European components.
- Aluminium head, tempered tension rollers for longer machine life.
- High tension levels achieved through adjustable clip system.
- Electronic control of the entire strap tensioning, sealing, cutting and feed process.
- Incorporated selector for polypropylene and polyester strapping.
- Equipped with seal cooling timer to improve seal quality.
- Prepared for integration into fully automatic lines.
- Safety standards. CE marking.

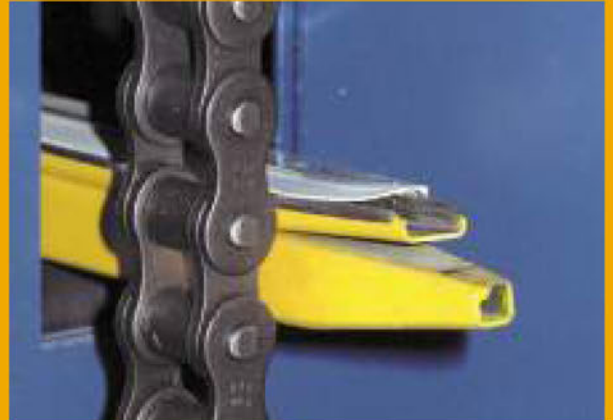

OPTIONS:



- Available in a multitude of different sized arches, from 1,000 mm to 3,000 mm, in both width and height.
- Telescopic bayonet for strapping pallets by passing the strap through the pallet woodwork.

Automatic strapping machine Vertical strapping with top seal



The control panel contains a selector for polypropylene or polyester strapping.

The 2200 is a top sealing machine, avoiding limitations on height and position of the pallet.

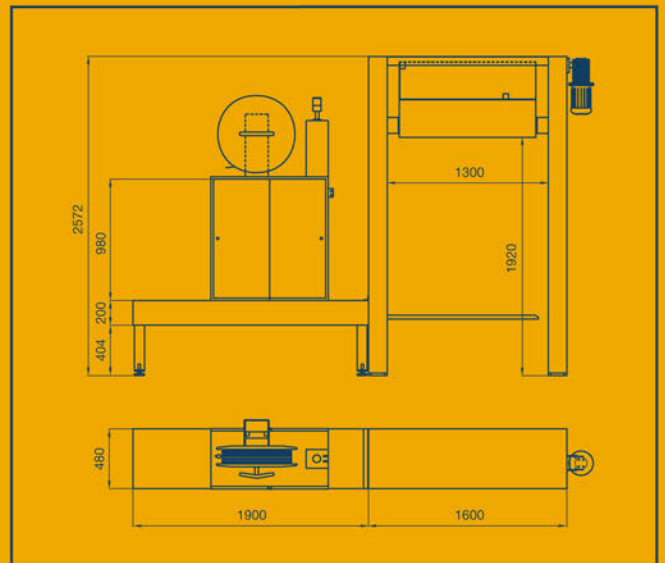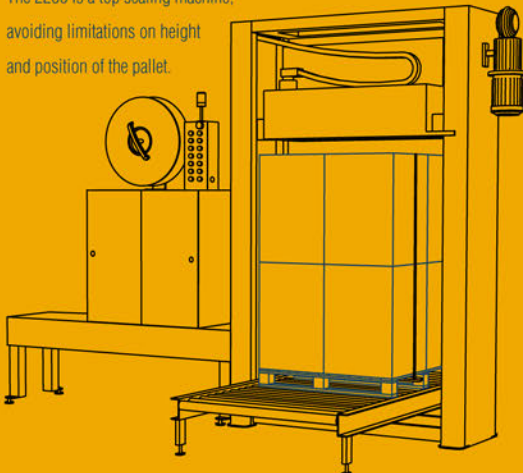

GENERAL CHARACTERISTICS

REQUIRED VOLTAGE: 220 V / 380 V - 50/60 Hz - 3 phase & neutral

CONSUMPTION: 1 Kw.

APPROX. PRODUCTION: 80 pallets / hour.

PACKED MACHINE DIMENSIONS: 1 package (200 Kg.).

210 X 70 X 240 cm.

TECHNICAL SPECIFICATIONS

STRAP WIDTH: 12-15.5 mm.

STRAP THICKNESS: 0.70-0.85 mm.

SEAL-WELDING: By electrical resistance.

Adjustable sealing temperature and cooling time.

01/04 Edition - We reserve the right to make any modification without prevention.

